

data specification for GBH glass door **RSZ-K1**, door drive underneath

GBH Design GmbH
Aufzugskomponenten
Am Branden 2
D-85256 Vierkirchen
Vertrieb: H. Huber
Telefon: +49 8139 9321315
Telefax: +49 8139 9321301
rupert.huber@gbh-design.de



Firm		Door width (mm)	mm
Name		Door height (mm)	mm
Phone		Shaft-R (mm)	mm
Fax		Cabine door	piece
e-Mail		Shaft door	piece
Key word			

technical description

shaft door:

DW 700 bis 2000mm, DH 2000 bis 3000mm

mechanism underneath

full glass door, VSG16 (bracket below)

door lock: two hook interlock

el. contact: IP20 splash water secured

unlocking device in the sill (triangle socket)

pieces stainless steel or electrogalvanize

attachment directly at the steel frame

load: DW 900 / DH 2100 approx. 175kg

options:

revision front apron high

revision upper door frame width

el. contact: IP64


special attachment on customer's request

covering behind area stainless steel

door leaf stainless steel


edge protector (0,8mm stainless steel)

special door frame

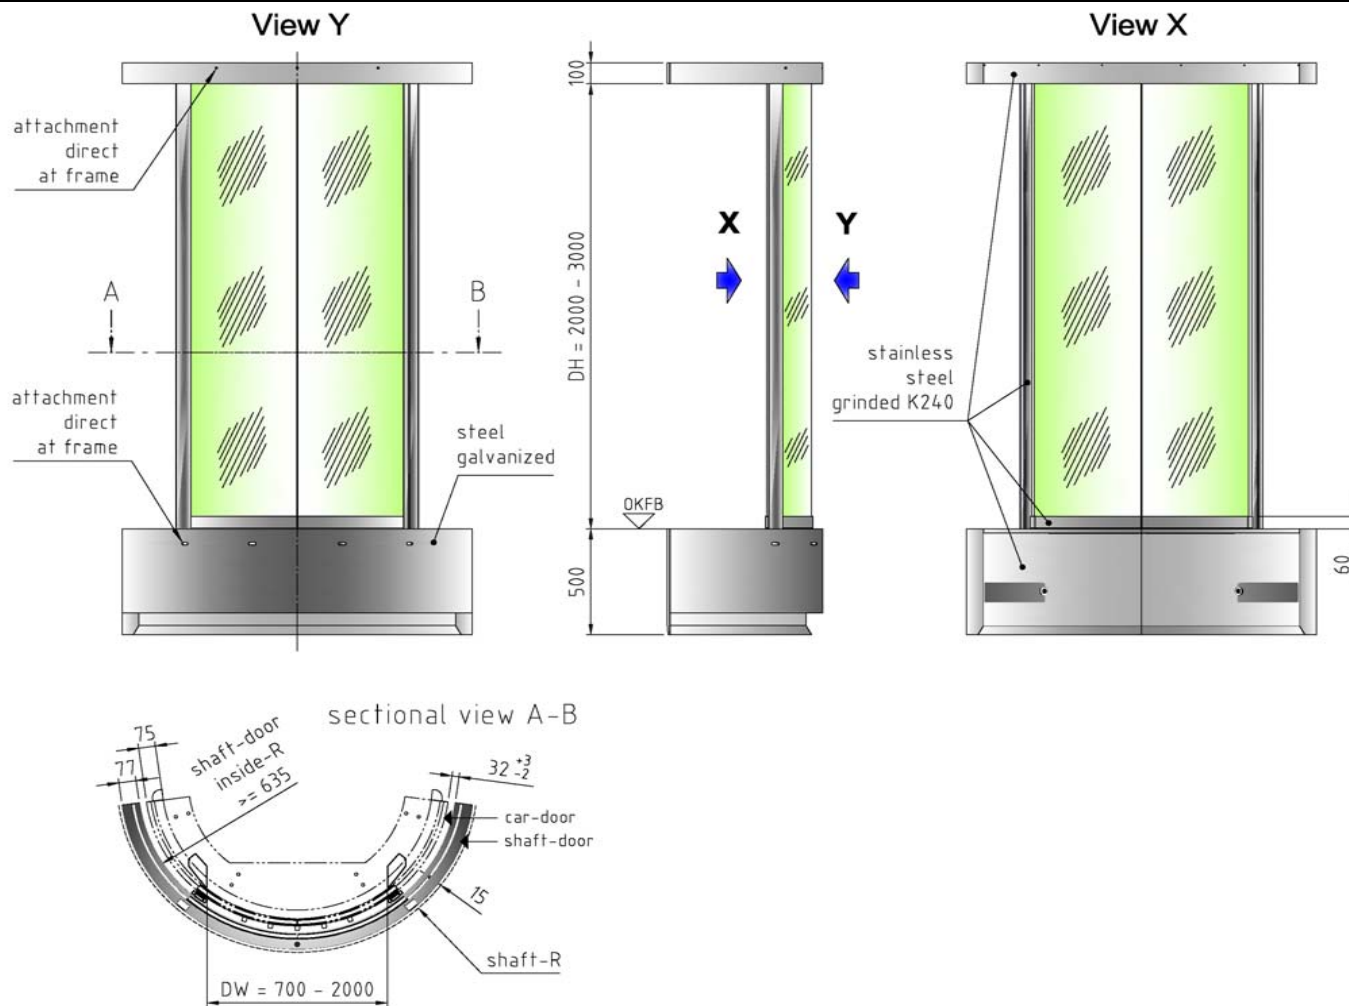

data specification for GBH glass door RSZ-S1, door drive underneath

GBH Design GmbH
 Aufzugskomponenten
 Am Branden 2
 D-85256 Vierkirchen
 Vertrieb: H. Huber
 Telefon: +49 8139 9321 315
 Telefax: +49 8139 9321 301
 rupert.huber@gbh-design.de

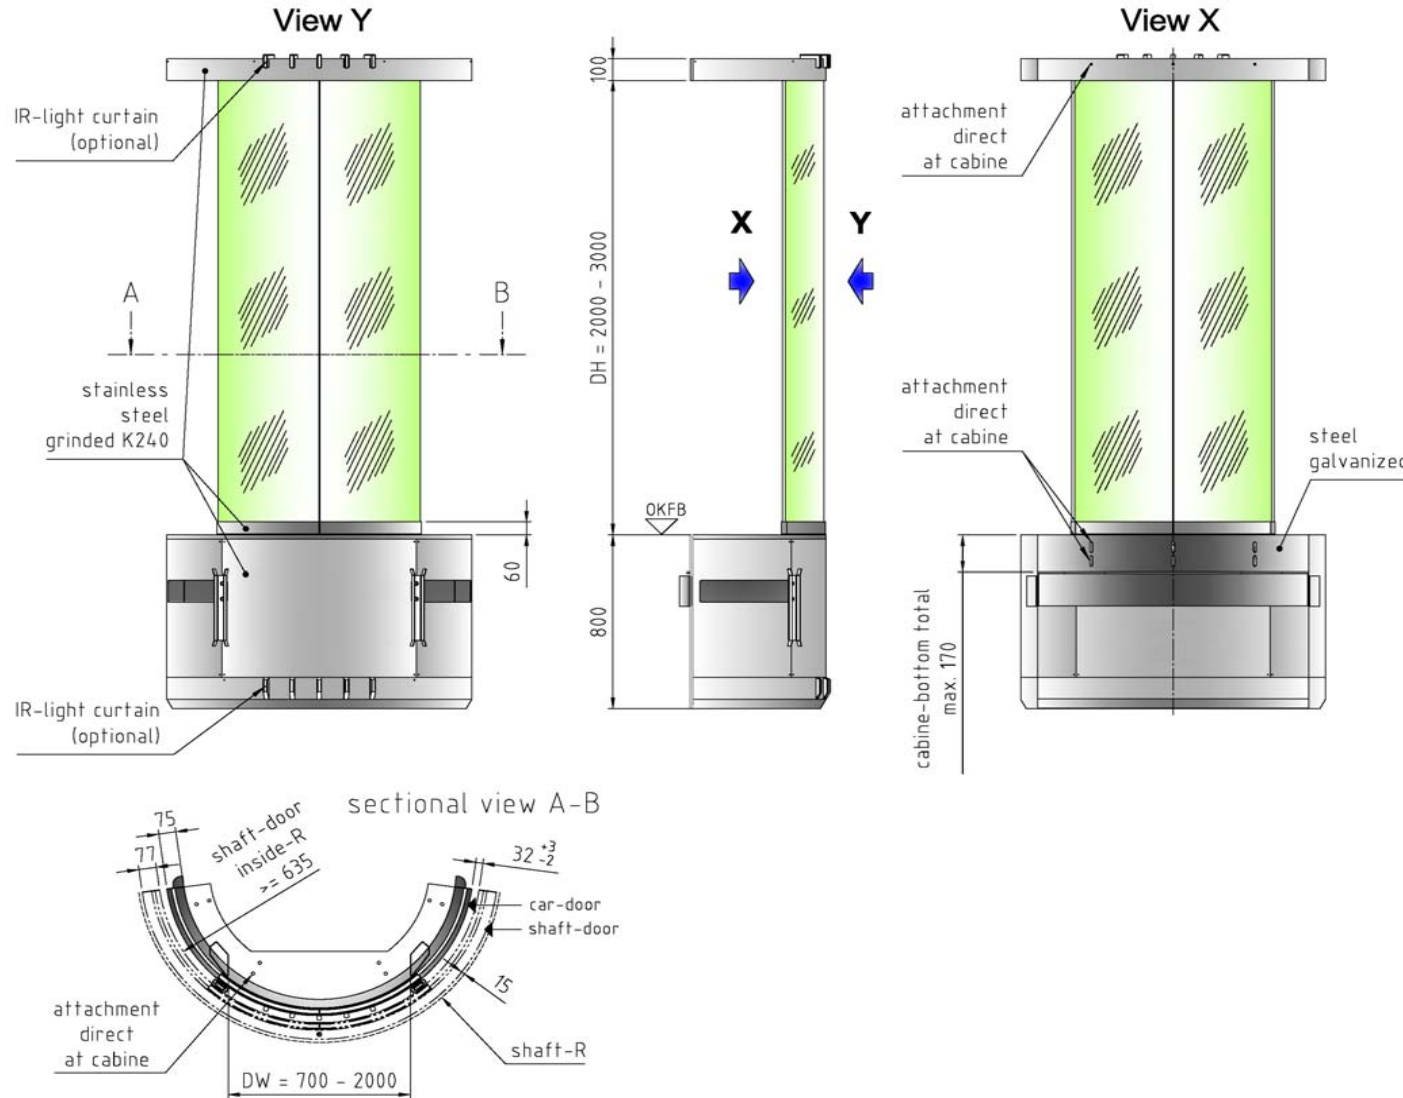

technical description

cabine door:

DW 700 bis 2000mm, DH 2000 bis 3000mm

mechanism underneath

full glass door, VSG16 (bracket below)

drive Siemens AT25

el. contact: IP64

pieces stainless steel or electrogalvanize

attachment directly at the cabine

load: DW 900 / DH 2100 approx. 240kg

options:

door leaf stainless steel

revision front apron high

revision upper door frame width

special attachment on customer's request

door-entrance on customer's request

light curtain with stainless steel bracket

electromagnetic door-interlock

type Kronenberg

by distance car-shaft >150mm

edge protector (0,8mm stainless steel)

covering behind area stainless steel